


FIGURE 1

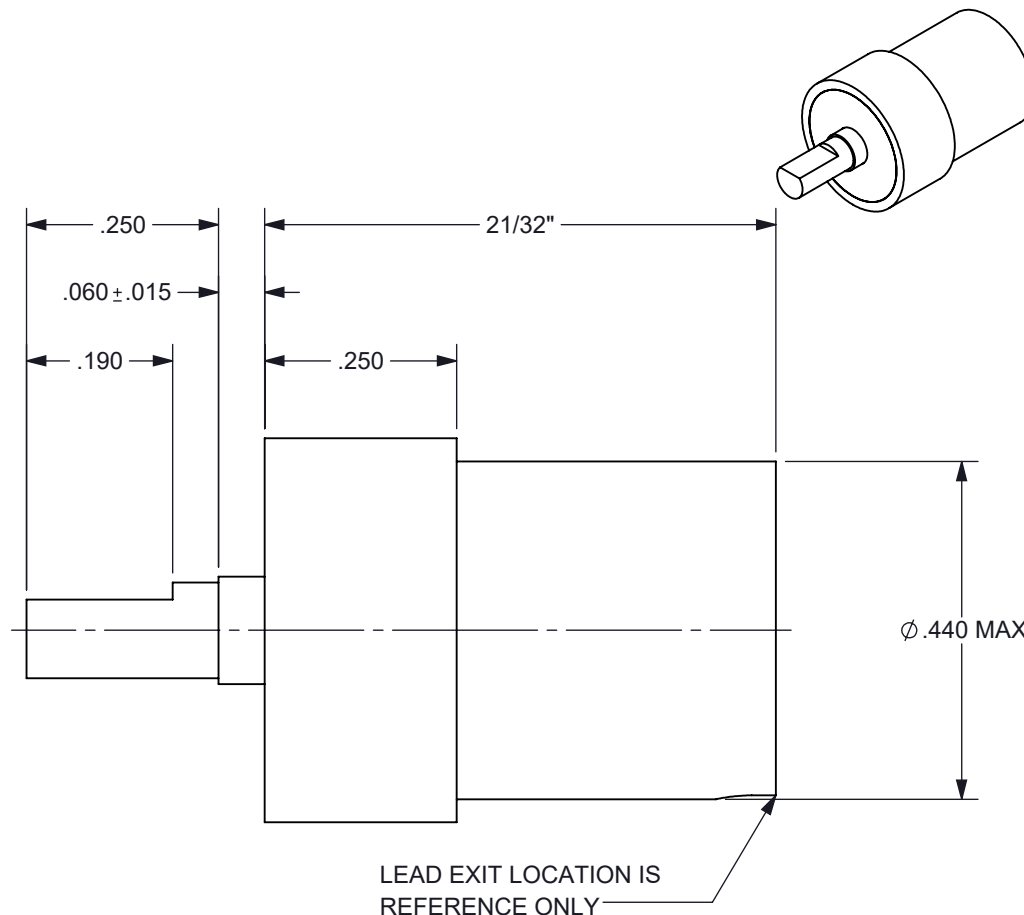

SPECIFICATIONS

- | | |
|---------------------|--|
| 1. PRODUCT TYPE | SELF-RESTORING SOLENOID, LOW OUTGAS |
| 2. TEMPERATURE | -40°C TO +71°C OPERATING RANGE |
| 3. TRAVEL | 60 ± 2° (CW) FROM POSITION SHOWN IN FIGURE 1 |
| 4. ROTATION | CW / RED (+) BLACK (-) |
| 5. VOLTAGE | 24V |
| 6. COIL | 600 Ohm ± 10% @ 25°C (CLASS H)] |
| 7. LEADS | RED AND BLACK 30 ET INSULATED WIRE M22759/33 |
| 8. LEAD LENGTH | 12" MIN, STRIPPED AND TINNED 1/8" ± 1/16" AT BOTH ENDS |
| 9. LEAD EXIT | LEAD EXIT TO BE FILLED WITH 3M 2216 B/A GRAY EPOXY |
| 10. HOUSING MARKING | LASER ENGRAVE BRANDSTROM, P/N, DATE CODE |
| 11. HOUSING FINISH | BLACK ANODIZE PER MIL-A-8625F, TYPE II, CLASS II |

PROPRIETARY DOCUMENT

DIMENSION TOLERANCES UNLESS OTHERWISE SPECIFIED ANGLES ± 1° 2 PLACES ± .010 FRACTIONS ± 1/32 3 PLACES ± .005 1 PLACE ± .015 4 PLACES ± .0005					
MATERIAL: SEE SPECS		DRAWN: P.T.			
FINISH: SEE SPECS		CHECKED: P.T.			
DATE: 01/21/21	SCALE: NONE	APPROVED: T.G.A.			
TITLE: SELF-RESTORING SOLENOID		DWG NO: A1439	SHEET: 1 of 1	REV:	